

2.54mm(.100") Wire To Wire And Wire To Board Connector








Shenzhen Hongru Connector Co., Ltd

Email: yukyli@hrb-connector.com
 Tel: 86-0755- 2709 6669
 Fax: 86-0755-2709 2392
 Skype: haiyuncheng-vivian
 Mobile(Whatsapp): 86-186 8112 3590
 Website: <http://www.hrb-connector.com>

SPECIFICATIONS:

- Current Rating:3A AC,DC
- Voltage Rating:250V AC,DC
- Operating Temperature:-25℃~+85℃
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:750V AC/minute
- Material:Nylon66 UL94V-2
- Use With:M2051-N/M2051R-N

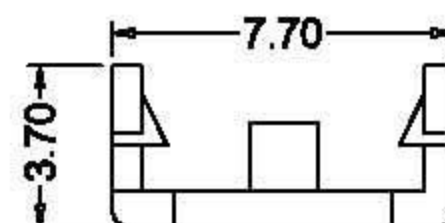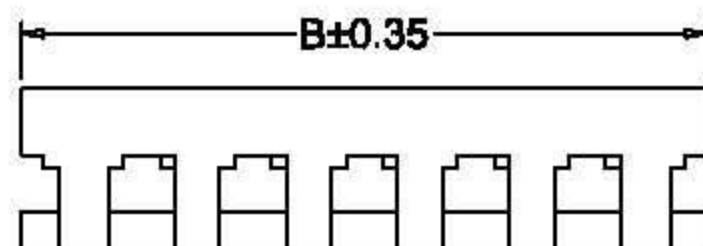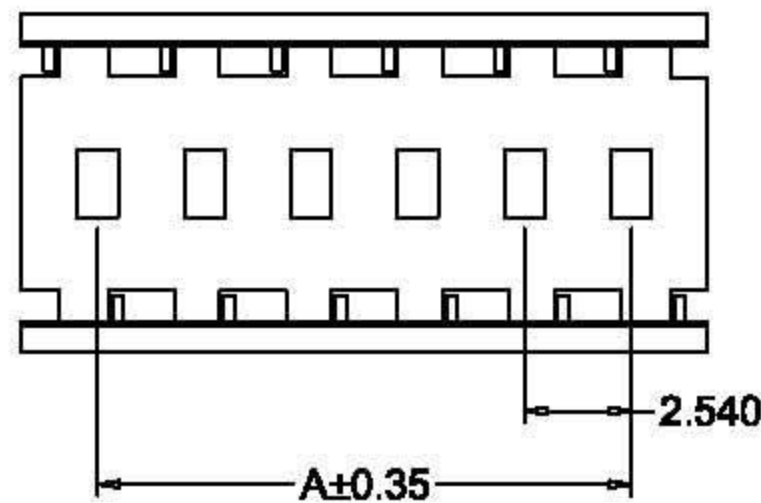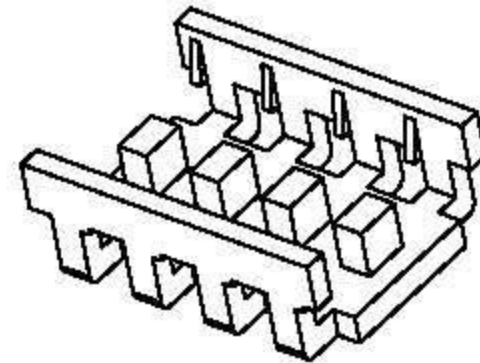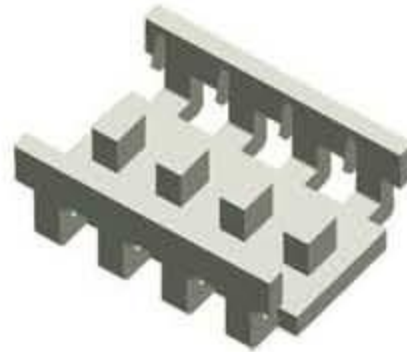

Ordering Information And Dimensions

Part NO.		Dimensions		Part NO.		Dimensions		Part NO.		Dimensions	
TYP UL94V-2	Circuits	Dim:A	Dim:B	TYP UL94V-2	Circuits	Dim:A	Dim:B	TYP UL94V-2	Circuits	Dim:A	Dim:B
M2053-2	2	2.54	5.08	M2053-10	10	22.86	25.40	M2053-18	18	43.18	45.72
M2053-3	3	5.08	7.62	M2053-11	11	25.40	27.94	M2053-19	19	45.72	48.26
M2053-4	4	7.62	10.16	M2053-12	12	27.94	30.48	M2053-20	20	48.26	50.80
M2053-5	5	10.16	12.70	M2053-13	13	30.48	33.02	M2053-21	21	50.80	53.34
M2053-6	6	12.70	15.24	M2053-14	14	33.02	35.56	M2053-22	22	53.34	55.88
M2053-7	7	15.24	17.78	M2053-15	15	35.56	38.10	M2053-23	23	55.88	58.42
M2053-8	8	17.78	20.32	M2053-16	16	38.10	40.64	M2053-24	24	58.42	60.96
M2053-9	9	20.32	22.86	M2053-17	17	40.64	43.18				

